

MUC-FP551


AMD Ryzen™ 3000 Series/Ryzen™ Embedded R2000 Series
with Radeon™ Graphics based Ultra-Compact Mini PC



Features

- CPU: AMD Ryzen™ 3000 Series/Embedded R2000 Series
- Memory: Dual Channel DDR4 for Memory up to 64GB
- Display: AMD Radeon™ Graphics, Displays via DP, HDMI, USB-C
- I/O Ports: 2 x USB-C, 2 x USB3.2, 2 x USB2.0, 1 x LAN(1.0GbE), Audio
- Storage: M.2_Key M for 2280 NVMe, M.2_Key M for 2242 NVMe/SATA
- Expansion: M.2_Key E for 2230 WiFi
- Power: 19V DC-in

AMD
together we advance_



Introduction

The MUC-FP551 is an ultra-compact Mini PC powered by AMD Ryzen™ Embedded R2000 Series and Ryzen™ 3000 Series processors with integrated AMD Radeon™ Graphics, delivering reliable performance for commercial and embedded computing applications in an extremely compact form factor. Measuring only 112.4 mm × 112.4 mm × 35.5 mm, the system supports dual-channel DDR4 memory up to 64GB and offers flexible storage expansion through dual M.2 slots for NVMe and SATA SSDs, making it ideal for space-limited deployments requiring efficient performance and modern connectivity.

Designed for compact multi-display and professional computing environments, the MUC-FP551 features dual HDMI outputs, a full-function USB-C port supporting USB 3.2 Gen2, DisplayPort, and power delivery, Gigabit Ethernet, multiple USB interfaces, and wireless expansion support via M.2 Key E. With active cooling, support for Windows 10/11 and Linux operating systems, and a lightweight ultra-compact chassis, the MUC-FP551 is well suited for digital signage players, office mini PCs, self-service terminals, education systems, and other commercial edge computing applications where compact size and flexible connectivity are essential.




H/W Monitor



Watchdog



I/O Interfaces

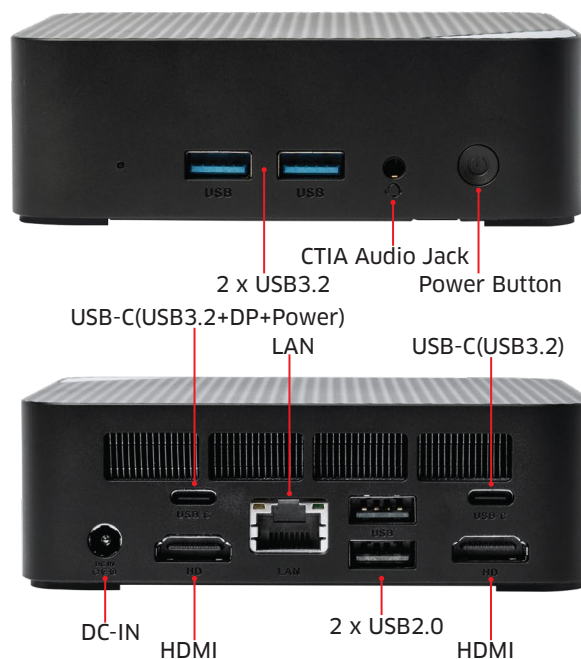


Technical Specifications

Processor	AMD Ryzen™ Embedded/5/7	R2314	R2514	3500U	3700U
	Total Cores/Threads	4C/4T	4C/8T	4C/8T	4C/8T
	Base Frequency/Clock	2.1GHz	2.1GHz	2.1GHz	2.3GHz
	Max Frequency/Boost Clock	3.5GHz	3.7GHz	3.7GHz	4GHz
	Total L3 Cache	4MB	4MB	4MB	4MB
	cTDP	15-35W	15-35W	15-35W	15-35W
	BIOS	AMI UEFI BIOS			
Memory	Type	Dual Channel SO-DIMM DDR4			
	Max. Capacity	64GB			
Display	GPU	Integrated AMD Radeon™ Graphics			
	Interface	2 x HDMI, 1 x USB-C(Full-functions)			
Ethernet	Controller	Realtek RTL8111H			
	Speed	10/100/1000Mbps			
	Interface	1 x RJ45			
Audio	Audio Codec	SenaryTech SN6186			
	Interface	1 x CTIA 2in1 Audio Jack(Line-out+Mic-in)			
Storage & Expansion	M.2_N	1 x M.2 Key M Slot for 2280 NVMe(PCIe x4) SSD			
	M.2_N/S	1 x M.2 Key M Slot for 2242 NVMe/SATA SSD			
	M.2_E	1 x M.2 Key E Slot for 2230 Wi-Fi&Bluetooth Module			
Other I/O	USB3.2	2 x USB 3.2 Gen2 Type-A ports			
	USB2.0	2 x USB2.0 Type-A ports			
	USB-C	2 x USB-C Type-C ports			
		(1 x Type-C port supports USB3.2 Gen2+DP+Power)			
		(1 x Type-C port supports USB3.2 Gen1)			
	TPM	Optional			
Dimension	Size	112.4 mm x 112.4 mm x 35.5mm (L x W x H)			
	Weight	N.W. Barebone: 0.308KG			
Power	Standard Port	19V DC-IN			
Temperature	Operating Temp.	0°C to 50°C			
	Storage Temp.	-20°C to 70°C			
Cooling		Active			
Operating System		Windows10/11 64bit, Linux 64bit.			

*All specifications and photos are subject to change without notice.

Dimension(in mm)

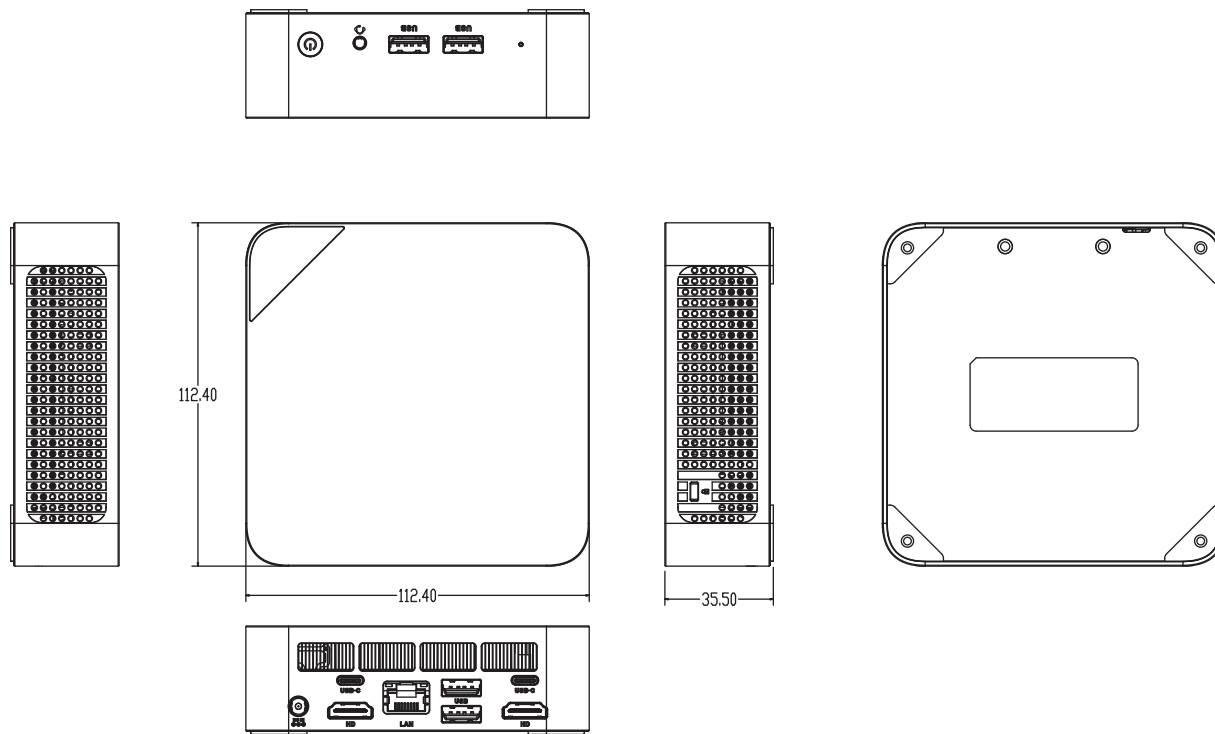

Copyright © 2026 Maxtang Technology Co. Ltd.. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.